
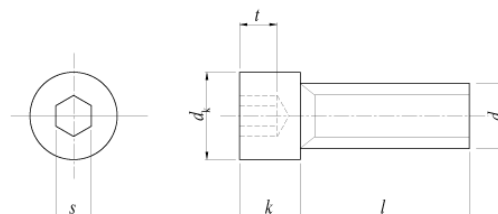


## 低頭小頭ボルト

概要 鋼製（三価クロメート）

詳細 ■材質：S45C ■強度区分：8.8 ■駆動部の形状：六角穴

代表品番 **K3LH**

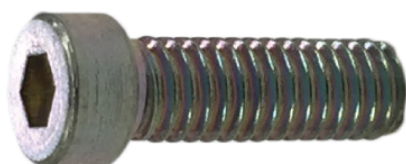

$d$	M3	M4	M5	M6	M8	M10	M12	
$d_k$	4.5	5.5	7	8.5	10	13	16	
$k$	2	2.8	3.5	4	5	6	7	
$s$	2	2.5	3	4	5	6	8	
$t_{max}$	1.5	2.3	2.7	3	3.8	4.5	5	
$l$	5	K3LH0305						
	6	K3LH0306	K3LH0406	K3LH0506				
	8	K3LH0308	K3LH0408	K3LH0508	K3LH0608			
	10	K3LH0310	K3LH0410	K3LH0510	K3LH0610	K3LH0810		
	12		K3LH0412	K3LH0512	K3LH0612	K3LH0812		
	16		K3LH0416	K3LH0516	K3LH0616	K3LH0816	K3LH1016	
	20		K3LH0420	K3LH0520	K3LH0620	K3LH0820	K3LH1020	K3LH1220
	25				K3LH0625	K3LH0825	K3LH1025	K3LH1225
	30					K3LH0830	K3LH1030	K3LH1230
	35						K3LH1035	