

水漏れ防止座金


概要 タッピンねじ | なべ頭

詳細 ■材質 (金属部): ステンレス鋼

■材質 (ゴム部): ネオプレンまたは EPDM

代表品番

SBDW

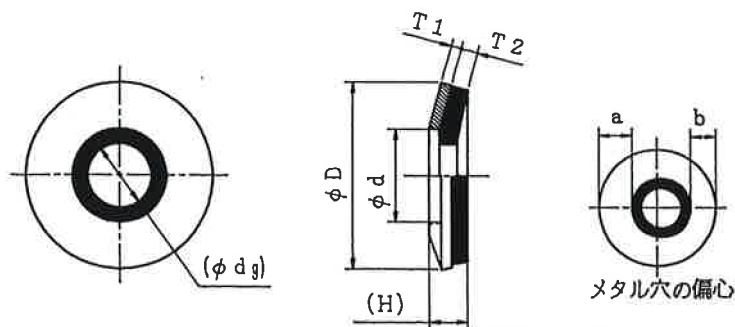

呼び径	D	d	d_g	H	T_1	T_2	$(a-b)_{\max}$
M1	3.5 ± 0.1	1.1 ± 0.05	~ 0.8	1.5	0.5 ± 0.1	$0.7^{+0.4}_{-0.1}$	0.1
M1.2	4.5 ± 0.1	1.5 ± 0.05	~ 1.0	1.5	0.5 ± 0.1	$0.7^{+0.4}_{-0.1}$	0.2
M1.4	4.5 ± 0.1	1.5 ± 0.05	$1.5 \sim 2.3$	1.5	0.5 ± 0.1	$0.7^{+0.4}_{-0.1}$	0.2
M2.6	5.5 ± 0.15	3.0 ± 0.1	$1.8 \sim 2.3$	1.5	0.5 ± 0.1	$0.7^{+0.4}_{-0.1}$	0.2
M3	9.5 ± 0.2	4.0 ± 0.2	$1.8 \sim 2.7$	3.5	1.0 ± 0.1	1.7 ± 0.3	0.3
M4	9.5 ± 0.2	5.0 ± 0.2	$2.7 \sim 3.6$	3.5	1.0 ± 0.1	1.7 ± 0.3	0.3
M5	12.5 ± 0.2	6.0 ± 0.25	$3.6 \sim 4.5$	3.7	1.0 ± 0.1	1.7 ± 0.3	0.36
M6	14 ± 0.2	7.0 ± 0.25	$4.5 \sim 5.6$	4.1	1.0 ± 0.1	1.7 ± 0.3	0.36
M6	16 ± 0.2	7.0 ± 0.25	$4.5 \sim 5.6$	4.1	1.0 ± 0.1	1.7 ± 0.3	0.36
M8	18 ± 0.2	9.0 ± 0.3	$6.0 \sim 7.5$	4.1	1.0 ± 0.1	1.7 ± 0.3	0.42
M8	19 ± 0.2	9.0 ± 0.3	$6.0 \sim 7.5$	4.3	1.0 ± 0.1	1.7 ± 0.3	0.42
M10	16 ± 0.2	11.0 ± 0.35	$7.7 \sim 9.4$	3.5	1.0 ± 0.1	1.7 ± 0.3	0.36
M10	22 ± 0.25	11.0 ± 0.35	$7.7 \sim 9.4$	4.3	1.0 ± 0.1	1.7 ± 0.3	0.42
M12	25 ± 0.3	12.7 ± 0.35	$9.2 \sim 11.3$	4.3	1.0 ± 0.1	1.7 ± 0.3	0.42
M16	$32^{0}_{-0.6}$	17.0 ± 0.35	$14.5 \sim 15.4$	4.3	1.0 ± 0.1	1.7 ± 0.3	0.42
M20	$32^{0}_{-0.6}$	$21^{0}_{-0.5}$	$19.0 \sim$	3.9	1.0 ± 0.1	1.7 ± 0.3	0.42